


Tensor, a division of CMC reserves the right to change its product specifications at any time. It is the responsibility of the person specifying the use of this product and of the purchaser to ensure that product specifications relied upon for design or procurement purposes are current and that the product is suitable for its intended use in each instance.


InterAx® FilterGrid™ is a composite geosynthetic consisting of InterAx geogrid bonded to a nonwoven geotextile. This product combines the most advanced InterAx geogrid technology with the added functionality of a nonwoven geotextile where site conditions require additional filtration and/or separation.

General

- The geogrid is manufactured from a coextruded, composite polymer sheet, which is then punched and oriented. The resulting structure consists of continuous and non-continuous ribs forming three aperture geometries (hexagon, trapezoid, and triangle) and an unimpeded suspended hexagon.

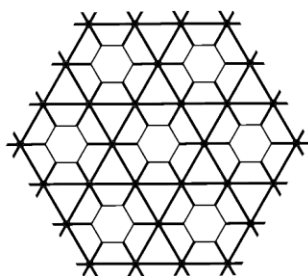

Tensor NX750 Geogrid
Plan View

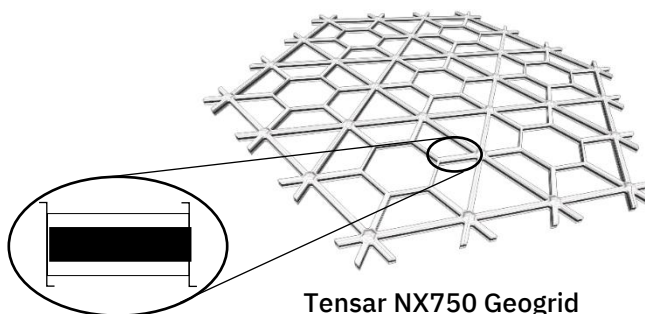

Tensor NX750 Geogrid
Perspective View

- The following properties are intended for product identification:

Identification Properties¹ - InterAx

- Aperture shapes
- Structure
- Rib shape
- Continuous parallel rib pitch⁽²⁾, mm (in)
- Rib aspect ratio⁽³⁾
- Node thickness⁽²⁾, mm (in)
- Color identification

General

Hexagonal, Trapezoidal, & Triangular
Coextruded & Integrally Formed
Rectangular
80 (3.2)
> 1.0
3.5 (0.14)
White / Black / White

- The needle punched nonwoven geotextile (nominal 6 oz / sy) is thermally bonded to the geogrid and is manufactured at a NTPEP audited facility. The geotextile shall have the following properties:

Index Properties - Geotextile	Test Method	English (MARV ²)	Metric (MARV ²)
▪ Grab Tensile Strength	ASTM D 4632	160lbs.	0.711 kN
▪ Grab Elongation	ASTM D 4632	50%	50%
▪ Trapezoid Tear Strength	ASTM D 4533	60 lbs.	0.267 kN
▪ CBR Puncture Resistance	ASTM D 6241	410 lbs.	1.823 kN
▪ Permittivity	ASTM D 4491	1.5 sec ⁻¹	1.5 sec ⁻¹
▪ Water Flow	ASTM D 4491	110 gpm/ft ²	4480 l/min/m ²
▪ Apparent Opening Size (AOS)	ASTM D 4751	70 Std. U.S.	0.212 mm
▪ UV Resistance	ASTM D 4355	70%/500 hrs.	70%/500 hrs.

Dimensions and Delivery

The geogrid shall be delivered to the jobsite in roll form with each roll individually identified. Rolls are shipped with nominal measurements.

Notes

1. Unless indicated otherwise, values shown are minimum average roll values determined in accordance with ASTM D4759-02
2. Nominal dimensions
3. Ratio of the mid-rib depth to the mid-rib width

Tensar, a Division of CMC
2500 Northwinds Pkwy., Ste. 500
Alpharetta, Georgia 30009

Phone: 800-TENSAR-1
www.tensarcorp.com

This specification supersedes any and all prior specifications for the product designated above and is not applicable to any product shipped prior to March 1, 2021. Tensar and InterAx are trademarks of Tensar, a division of CMC or its affiliates in the US and many other countries. U.S. and foreign patents pending on this product and its method of manufacture and use. Final determination of the suitability of the above-mentioned information or product for the use contemplated, and its manner of use are the sole responsibility of the user. Tensar disclaims any and all express, implied or statutory warranties, including but not limited to, any warranty of merchantability or fitness for a particular purpose regarding this product or the Company's other products, technologies or services. The information contained herein does not constitute engineering advice. (07.22)